


SPECIFICATION OF BSF6030BNRM SERIES

FEATURES

1. Low profile construction and miniature size.
2. Magnetic shielded construction.
3. High current saturation.
4. For new generation portable product D/D converter unit.

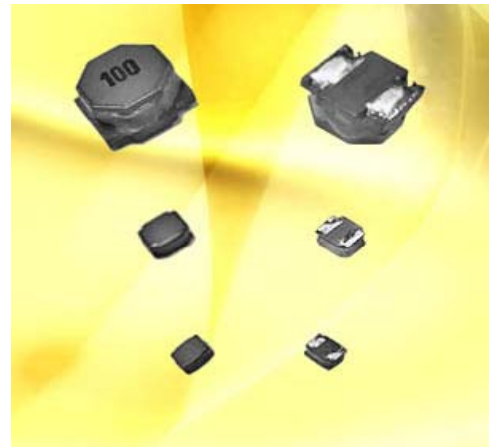

APPLICATIONS

DVD · DSC · PDA · LCD display ·
Smart phones · HDD · etc.

ORDERING CODE

BSF6030BNRM R68 M T
(1) (2) (3)(4)

- (1) PRODUCT TYPE CODE AND SIZE CODE
(2) INDUCTANCE
(3) INDUCTANCE TOLERANCE (M : ±20%, N : ±30%)
(4) REEL TAPING

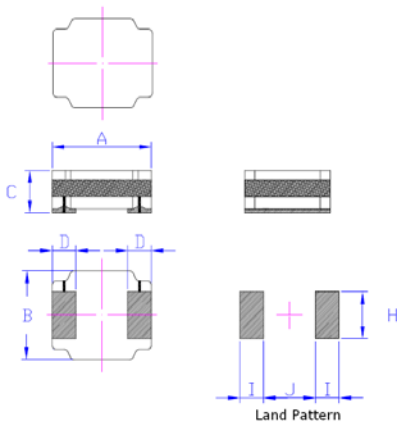


FIG 1

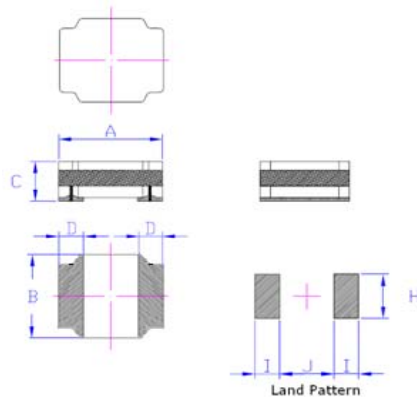


FIG 2

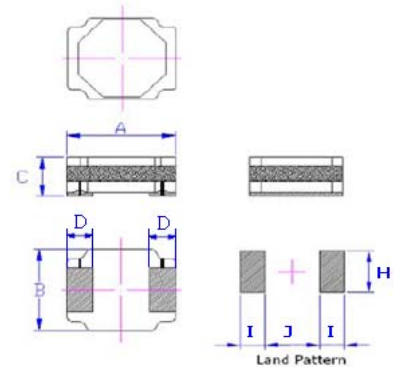


FIG 3

SHAPE & DIMENSIONS

SIZE CODE	A mm	B mm	C mm	D mm	H	I	J	FIG
BSF2010BNRM	2.0±0.2	1.6±0.2	1.05max	0.6±0.2	1.10	1.00	0.90	1
BSF2512BNRM	2.5±0.2	2.1±0.2	1.25max	0.85±0.20	1.40	0.95	0.90	1
BSF3010BNRM	3.0±0.2	3.0±0.2	1.05max	0.9±0.2	2.90	1.00	1.20	2
BSF3012BNRM	3.0±0.2	3.0±0.2	1.25max	0.9±0.2	2.90	1.00	1.20	2
BSF3015BNRM	3.0±0.2	3.0±0.2	1.55max	0.9±0.2	2.90	1.00	1.20	2
BSF6030BNRM	6.0±0.2	6.0±0.2	3.0±0.2	1.9±0.3	5.70	1.80	2.40	3

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

SMD POWER INDUCTORS → BSF6030BNRM SERIES

ELECTRICAL CHARACTERISTIC

ORDERING CODE	Inductance (μ H)	DC Resistance ($m\Omega$)max	SRF(MHz) min	Isat (A)Typ	IDC (A)Typ
BSF6030BNRMR47MT	0.47	7.5	50	25.0	14.0
BSF6030BNRMR68MT	0.68	8	45	23.00	14.00
BSF6030BNRM1R0MT	1.00	9	40.0	16.50	13.00
BSF6030BNRM1R5MT	1.50	13	30	13.00	8.20
BSF6030BNRM2R2MT	2.20	17	25.0	11.00	8.10
BSF6030BNRM3R3MT	3.30	25	20	8.20	7.00
BSF6030BNRM4R7MT	4.70	43	15.0	7.20	6.80
BSF6030BNRM6R8MT	6.80	50	13	6.25	5.50
BSF6030BNRM100MT	10.0	67	7.0	4.80	4.40
BSF6030BNRM150MT	15.0	115	7	3.80	3.00
BSF6030BNRM220MT	22.0	170	5.0	3.20	2.90
BSF6030BNRM330MT	33.0	250	2.5	2.60	2.60
BSF6030BNRM470MT	47.0	320	2.5	2.30	2.10

※Test Frequency: 100KHz/1V

※Tolerance: M \pm 20%

※Isat: Based on Inductance decrease 30%

※IDC: Based on Temperature increase 40°C














※Operating temperature range : -40 to +125°C (including self-heating)

※Storage Temp. : -40°C T0+85°C

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

SMD POWER INDUCTORS → BSF6030BNRM SERIES

ELECTRICAL CHARACTERISTIC

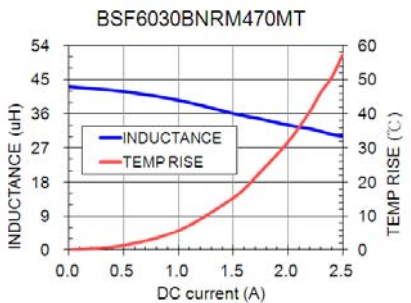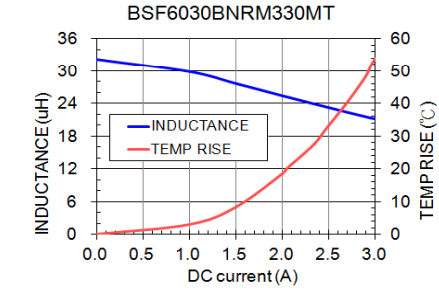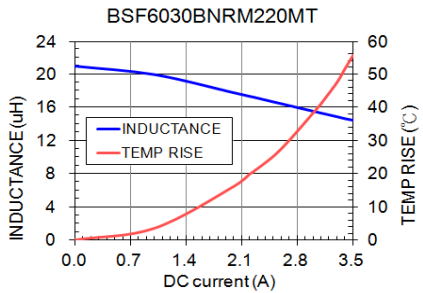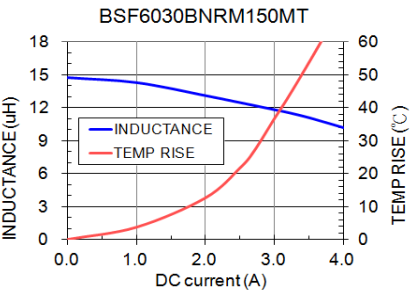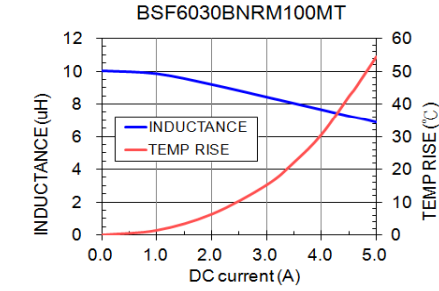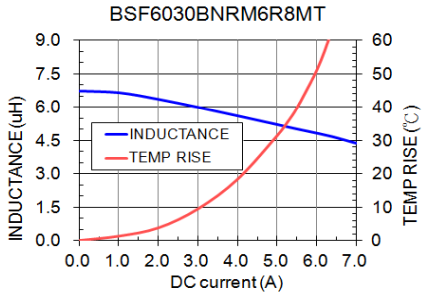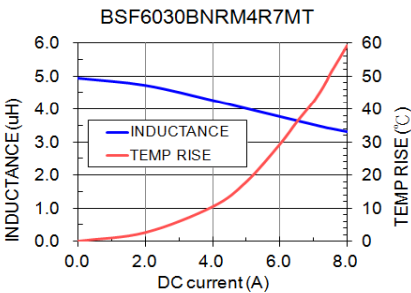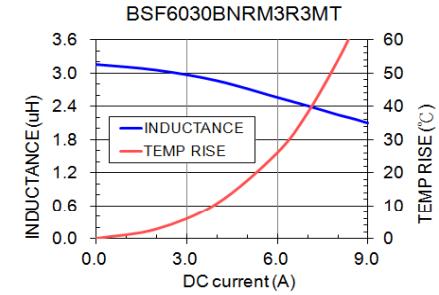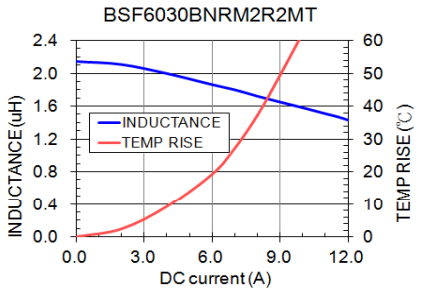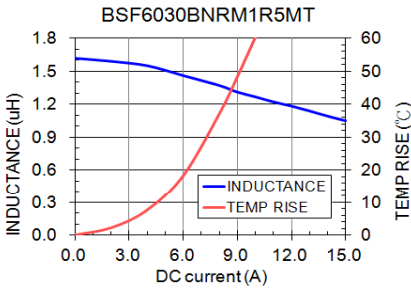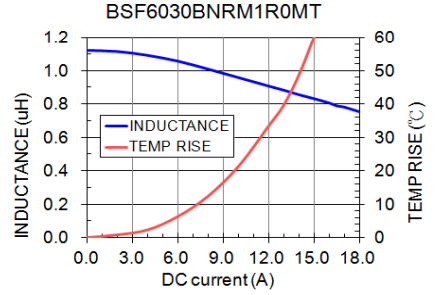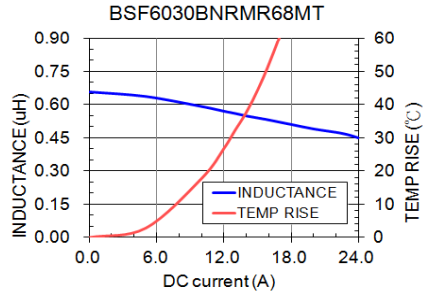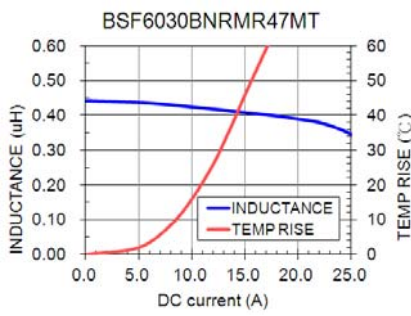

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.