

SPECIFICATION OF BSF□D□□RHSU SERIES

FEATURES

Compact and thin Large permissible DC current and low DC resistance.



APPLICATIONS

1. DC to DC converter of portable equipment.
2. Camcorder , LCD television set , Digital still camera , P.D.A. , Notebook.
3. Small size communication equipment.




ORDERING CODE


BSF2D14RHSU **100** **N** **T**
 (1) (2) (3) (4)

- (1) PRODUCT TYPE CODE AND SIZE CODE
- (2) INDUCTANCE
- (3) INDUCTANCE TOLERANCE (M : ±20%, N : ±30%)
- (4) REEL TAPING

2D 3D

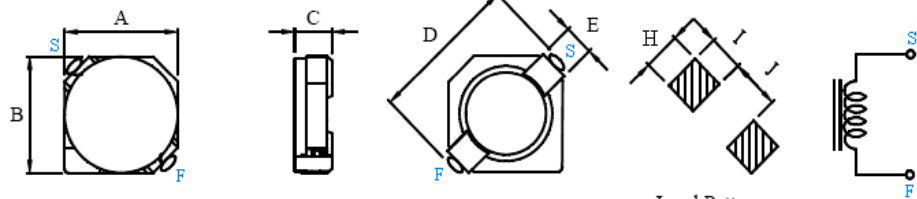

4D 5D 6D

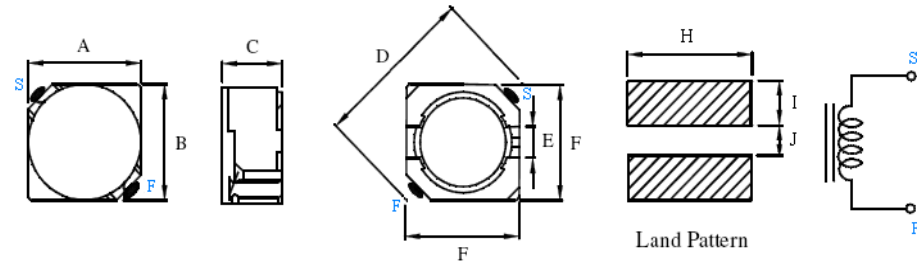


SHAPE & DIMENSIONS

SIZE CODE	A (max)	B (max)	C (max)	D (max)	E (Ref.)	F	H	I	J
BSF2D09RHSU	3.2	3.2	1.00	4.3	1.0	-	1.3	1.3	1.7
BSF2D11RHSU	3.2	3.2	1.20	4.3	1.0	-	1.3	1.3	1.7
BSF2D14RHSU	3.2	3.2	1.55	4.3	1.0	-	1.3	1.3	1.7
BSF2D18RHSU	3.2	3.2	2.00	4.3	1.0	-	1.3	1.3	1.7
BSF3D11RHSU	4.0	4.0	1.20	5.2	1.0	-	1.3	1.4	2.4
BSF3D16RHSU	4.0	4.0	1.80	5.2	1.0	-	1.3	1.4	2.4
BSF3D28RHSU	4.0	4.0	3.00	5.2	1.0	-	1.3	1.4	2.4
SIZE CODE	A ±0.3	B ±0.3	C (max)	D (max)	E (Ref.)	F (Ref.)	H	I	J
BSF4D18RHSU	4.7	4.7	2.0	6.9	1.5	4.5	5.3	1.90	1.5
BSF4D28RHSU	4.7	4.7	3.0	6.9	1.5	4.5	5.3	1.90	1.5
BSF5D18RHSU	5.7	5.7	2.0	8.2	2.0	5.5	6.3	2.15	2.0
BSF5D28RHSU	5.7	5.7	3.0	8.2	2.0	5.5	6.3	2.15	2.0
BSF6D28RHSU	6.7	6.7	3.0	9.5	2.0	6.5	7.3	2.65	2.0
BSF6D38RHSU	6.7	6.7	4.0	9.5	2.0	6.5	7.3	2.65	2.0

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

SMD POWER INDUCTORS → BSF□D□□RHSU SERIES

8D Series

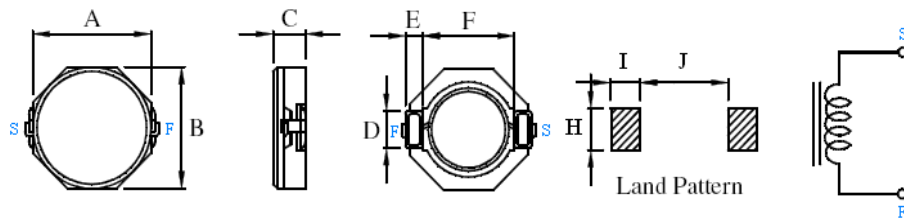

UNIT:mm

SIZE CODE	A (max)	B (max)	C (max)	D (max)	E (Ref.)	F	H	I	J
BSF8D28RHSU	8.3	8.3	3.0	2.5	1.2	6.3	2.8	2.0	6.1
BSF8D43RHSU	8.3	8.3	4.5	2.5	1.2	6.3	2.8	2.0	6.1

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

SMD POWER INDUCTORS → BSF2D14RHSU SERIES

ELECTRICAL CHARACTERISTIC

ORDERING CODE	Inductance (μ H)	Test Frequency (KHz)	DC Resistance (Ω)max	Isat (A)max
BSF2D14RHSU1R5NT	1.5	100	0.0630	1.800
BSF2D14RHSU1R8NT	1.8	100	0.0750	1.650
BSF2D14RHSU2R2NT	2.2	100	0.0940	1.500
BSF2D14RHSU2R7NT	2.7	100	0.1060	1.350
BSF2D14RHSU3R3NT	3.3	100	0.1250	1.200
BSF2D14RHSU3R9NT	3.9	100	0.1380	1.100
BSF2D14RHSU4R7NT	4.7	100	0.1690	1.000
BSF2D14RHSU5R6NT	5.6	100	0.1880	0.945
BSF2D14RHSU6R8NT	6.8	100	0.2130	0.850
BSF2D14RHSU8R2NT	8.2	100	0.2810	0.800
BSF2D14RHSU100NT	10.0	100	0.2940	0.700
BSF2D14RHSU120NT	12.0	100	0.3940	0.620

Test Freq.:100KHz/0.1V

Tolerance : N± 30%

※Isat:Based on Inductance decrease 35%

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.



KING CORE ELECTRONICS INC.
 Tel:886-3-4698855 Fax:886-3-4691395

No.269,Nanfong Rd.,Pingjhen City,Taoyuan County, Taiwan
 E-mail:kc@mail.kingcore.com.tw Web Site:http://www.kingcore.com.tw